

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p><b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>					
1. REPORT DATE (DD-MM-YYYY) 05-05-2005		2. REPORT TYPE Proceeding		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE  ACOUSTIC-ELASTIC SCATTERING PREDICTIONS AND EXPERIMENTAL VERIFICATIONS VIA WATER TANK EXPERIMENTS				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 061153N	
6. AUTHOR(S)  Dennis Lindwall, Richard Keiffer, Warren Wood and Robert Zingarelli				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory Seafloor Sciences Branch Stennis Space Center, MS 39529				8. PERFORMING ORGANIZATION REPORT NUMBER NRL/PP/7430-04-11	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Office of Naval Research 800 North Quincy Street Arlington, VA 22217-5660				10. SPONSOR/MONITOR'S ACRONYM(S) ONR	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited					
13. SUPPLEMENTARY NOTES Proceedings of the Seventh European Conference on Underwater Acoustics, ECUA 2004, Delft, The Netherland 5-8 July, 2004					
14. ABSTRACT <i>We are beginning a new series of laboratory acoustic experiments that will examine the detailed physics of acoustic-elastic scattering. These experiments will measure up-scattered acoustic waves, down-scattered elastic waves, and scattered interface waves from edges and embedded objects using a variety of sensors. One of our goals is to verify a density-contrast hypothesis upon which the Wedge Assemblage numerical rough-interface scattering model is based and which is applicable to many seafloor acoustic environments. We are predicting some of these experimental results with calculations using finite difference (FD) codes that are designed for 2 and 3-D acoustic and 2-D elastic environments. We will use these FD</i>					
15. SUBJECT TERMS Physical modelling, scattered elastic wave phases					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT  SAR	18. NUMBER OF PAGES  6	19a. NAME OF RESPONSIBLE PERSON Dennis Lindwall
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 228-688-5306

## **ACOUSTIC-ELASTIC SCATTERING PREDICTIONS AND EXPERIMENTAL VERIFICATIONS VIA WATER TANK EXPERIMENTS**

Dennis Lindwall, Richard Keiffer, Warren Wood and Robert Zingarelli

Dennis Lindwall, Naval Research Laboratory, Code 7432, Stennis Space Center, MS 39529-5000, USA    e-mail: lindwall@nrlssc.navy.mil  
Richard Keiffer, Naval Research Laboratory, Code 7181, Stennis Space Center, MS 39529-5000, USA    e-mail: keiffer@nrlssc.navy.mil  
Warren Wood, Naval Research Laboratory, Code 7432, Stennis Space Center, MS 39529-5000, USA    e-mail: wwood@nrlssc.navy.mil  
Robert Zingarelli, Naval Research Laboratory, Code 7181, Stennis Space Center, MS 39529-5000, USA    e-mail: zingarelli@nrlssc.navy.mil

*We are beginning a new series of laboratory acoustic experiments that will examine the detailed physics of acoustic-elastic scattering. These experiments will measure up-scattered acoustic waves, down-scattered elastic waves, and scattered interface waves from edges and embedded objects using a variety of sensors. One of our goals is to verify a density-contrast hypothesis upon which the Wedge Assemblage numerical rough-interface scattering model is based and which is applicable to many seafloor acoustic environments. We are predicting some of these experimental results with calculations using finite difference (FD) codes that are designed for 2 and 3-D acoustic and 2-D elastic environments. We will use these FD calculations to predict the range of validity of the density-contrast approximation and then design laboratory experiments with properties throughout and beyond this predicted range to the point of failure. Our laboratory experiments will also provide a test of the accuracy of the elastic scattering calculations by the FD codes.*

### **1. INTRODUCTION: WAVEFIELDS IN PENETRABLE SURFACES**

The purpose of this component of the Physical Modelling Project at the Naval Research Lab has two parts. One: determine the relative importance of scattered elastic wave phases, clarifying the subcritical scattering problem. Two: validate the density contrast hypothesis upon which the Wedge Assemblage model is based. Our approach is to construct a suite of physical models in water in which multiple types of elastic waves will be excited and to measure the extent of these converted elastic waves. In order to get the most information out

of a limited number of physical models, we have calculated the expected responses from possible model properties and instrument configurations using numerical finite difference wave propagation codes. There are many wave propagation models that are very accurate for planar interfaces but none have been evaluated for through-propagating rough-surface scattering. We are currently running calculations with two acoustic finite-difference programs and two elastic finite-difference codes with environments that will highlight the significance of the converted elastic waves and to test the limits, at least in a few cases, of the density contrast hypothesis. We present here some of these results.

In our physical model experiments we anticipate using blocks of homogeneous material placed in a water tank. We will use transducer-generated sound waves in the water and measure the scattered waves with hydrophones in the water and with accelerometers on the surfaces of the elastic blocks.

## **2. PREDICTED IMPORTANCE OF ELASTIC-CONVERTED SCATTERED WAVES.**

Understanding rough surface scattering is critical for marine seafloor acoustics. The simplest element of rough surface scattering is from a single edge. We are using the classic problem of an elastic (or acoustic) quarter space within an acoustic media (Figure 1). The sound source is within the water and we calculate the wavefield in the entire space for both the elastic and acoustic quarter space. By using a quarter space, we avoid possible scattering from a stair-step interface due to the square grids. For these calculations we used the finite difference that comes with the Seismic Unix (SU) software package [1]. The *suea2df* program within SU was written by Chris Juhlin of Uppsala University based on the algorithms of Juhlin [2] and Levander [3].

In both the acoustic and the elastic quarter space calculations, the direct wave, the corner scattered wave, the transmitted pressure wave and a few other phases are clearly visible (Figure 1). The difference of the acoustic and the elastic calculation shows that there is not only considerable energy in the elastic converted waves but there is also a difference in the scattered and reflected acoustic waves in the water.

The scattered interface waves remain very near the quarter-space surface and are slower than the transmitted and scattered shear waves. A physical experiment designed to test these calculations will need to have accelerometers placed on these surfaces. These calculations also suggest that scattered converted waves can be important in a seafloor type of geometry where there are multiple corners along a rough surface which can scatter these elastic waves back as acoustic waves in the water.

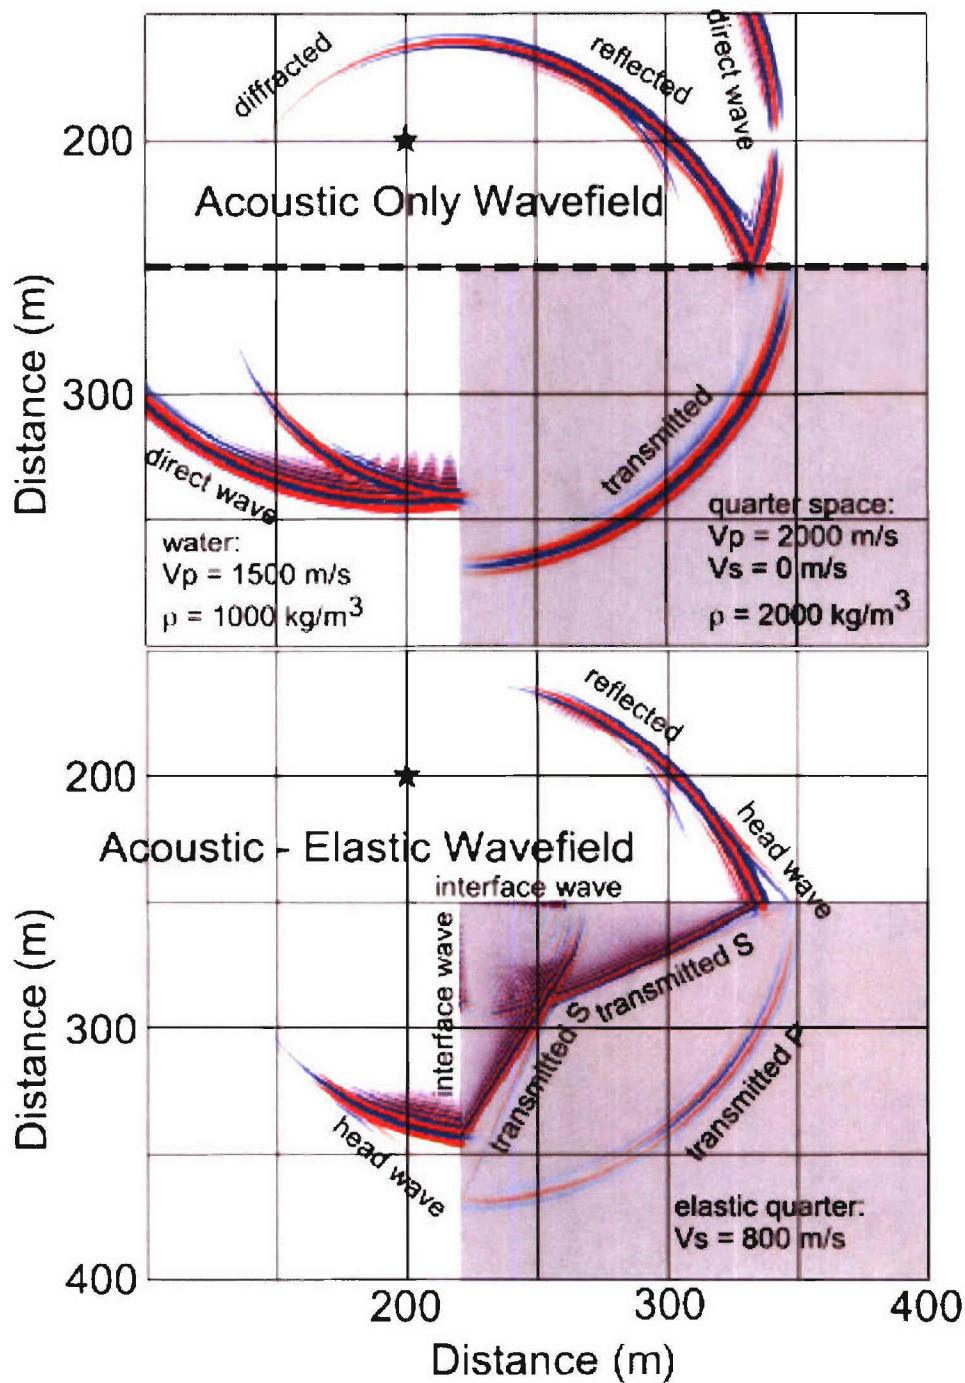


Fig. 1: Acoustic and elastic wavefield snapshots (at 0.1 seconds) as calculated by the vertical displacement. The source is at the black star. Positive and negative amplitudes are represented as blue and red. The lower pane shows the difference between the acoustic and the elastic calculations with strong interface waves and diffracted and refracted shear waves within the elastic body. The interface waves, although small in volume filled, have large amplitudes.

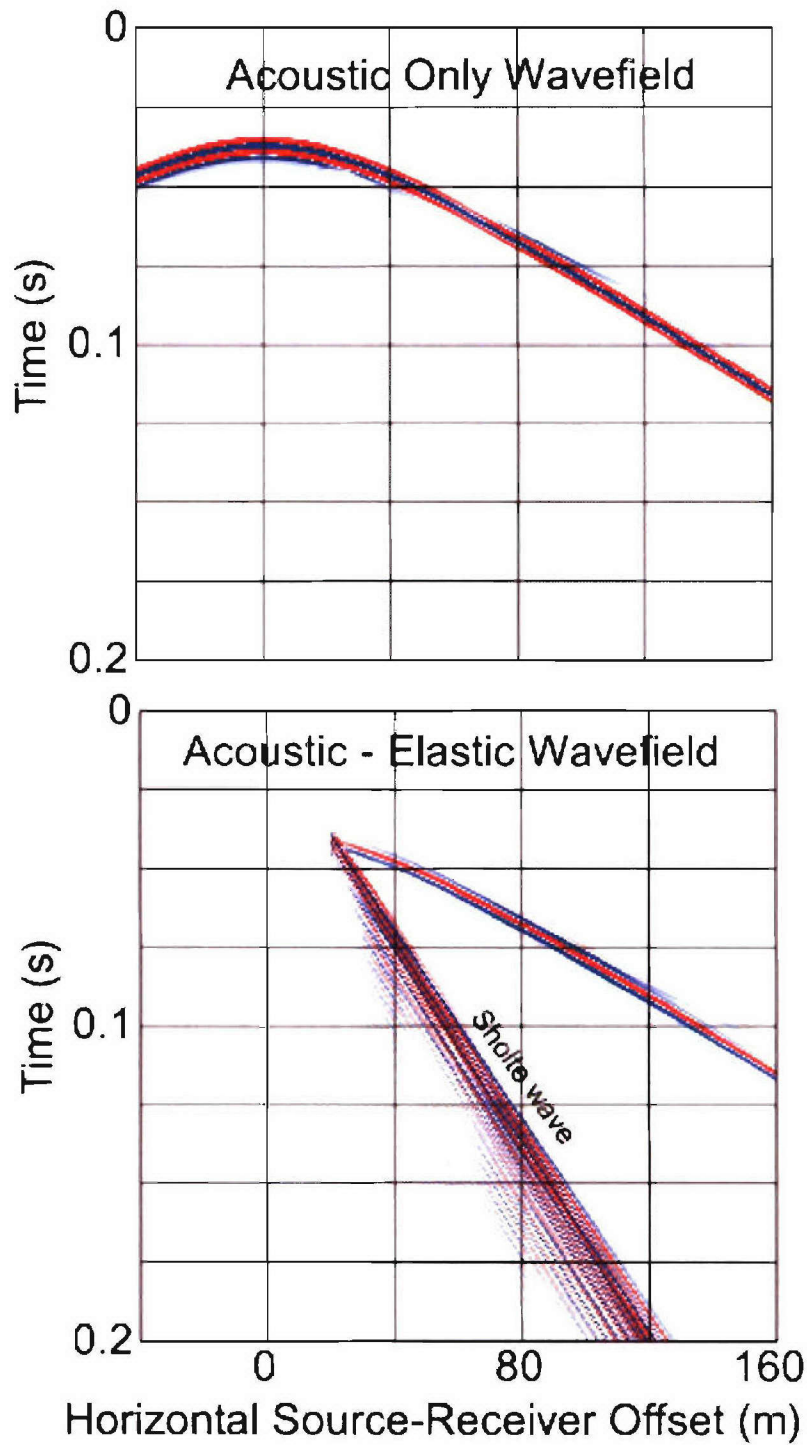



Fig. 2: The response of a line of sensors at 250 m depth in Fig. 2 (along the surface of the block) displayed in the fashion of a seismic record with time increasing downward. Positive and negative amplitudes are represented as blue and red. These sensors are located to show the strength of the interface waves, in this case Sholte waves generated from the purely acoustic source.



### 3. TESTING THE DENSITY CONTRAST HYPOTHESIS

It has been pointed out in a number of papers, (e.g., Hamilton [4]) that for many marine sediments the acoustic impedance contrast at the water/seafloor interface is driven primarily by changes in density and secondarily by changes in sound speed. Unconsolidated sediments common in low-energy environments are usually silts and clays with densities ranging from 1.2 to 1.6 g/cc and compressional wave velocities between 1450 m/s and 1600 m/s. Even in coarse sands where the sound speed ratio (water/sediment) may reach 1.2, the change in density controls the variation in the impedance. The so-called “density-contrast hypotheses” proposes that acoustic scattering from rough marine sediments can accurately be predicted through consideration of the interface roughness and the changes in density at the interface.

In this preliminary study, a FDTD solution to the 2D acoustic wave equation was used to calculate the apex-diffracted signals from 90° wedges having different densities and compressional wave speeds. Three densities (1.5, 2.0, and 2.5 g/cc) and three compressional wave speeds (1500, 1575, and 1650 m/s) were used. The line source in this problem consisted emitted a Gaussian-tapered cosinusoidal signal centered at 300 Hz. Figure 3 shows the diffracted signals detected at a receiver located near the source for the case where the wedge density was 1.5 g/cc. Of all the cases studied, this was the example that showed the greatest sensitivity to changes in the compressional wave speed. Here, it can be seen that the diffracted signal is relatively unchanged by a 5% change in sound speed but a 10 % change in compressional velocity inside the wedge dramatically changes the magnitude of the diffracted signal.

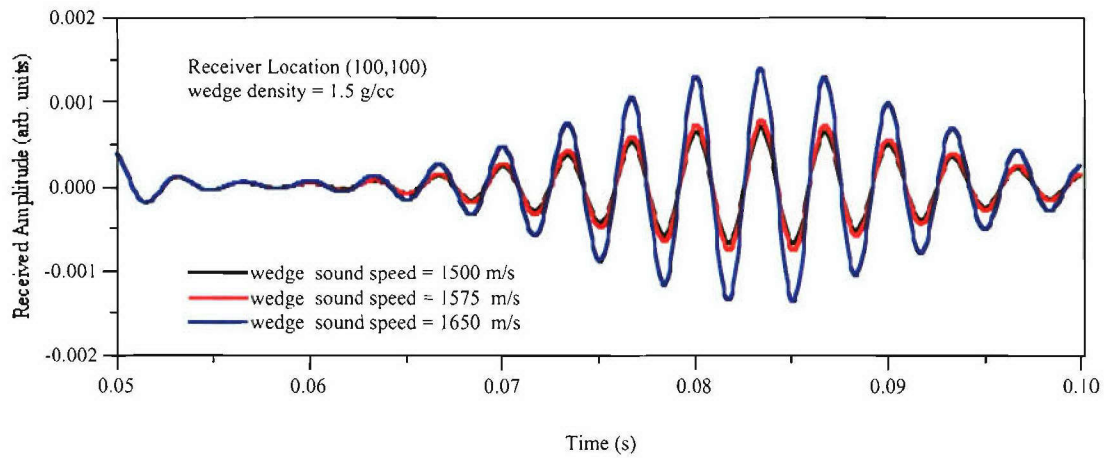

*Fig. 3. Sensitivity of apex-diffracted signals to compressional wave speed contrast*

Repeating this numerical experiment, that is using the same source and receiver location but now using a denser wedge material (now 2.5 g/cc) yielded results which were insensitive to variations in the compressional wave speed (Figure 4). These results suggest that the density contrast hypothesis is valid for a broader range of compressional wave speeds when the density is high (such as for a sandy seafloor) than for low densities (as for silty seafloors).

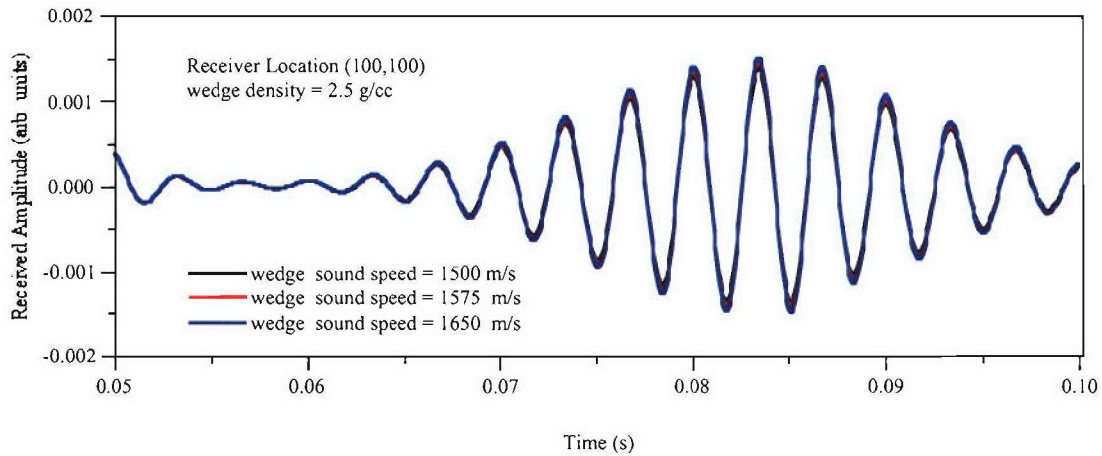


Fig. 4 Sensitivity of apex-diffracted signals to compressional wave speed contrast

#### 4. ACKNOWLEDGEMENTS

This work is funded under the Office of Naval Research Program Element number 061153N.

#### REFERENCES

- [1] **Cohen, J. K. and Stockwell, Jr. J. W.**, CWP/SU: Seismic Unix Release 37: a free package for seismic research and processing, Center for Wave Phenomena, Colorado School of Mines, 2003.
- [2] **Juhlin, C.** Finite difference elastic wave propagation in 2-D heterogeneous transversely isotropic media, *Geophysical Prospecting*, volume 53, pp. 843-858, 1995.
- [3] **Levander, A. R.**, Fourth-order finite-difference P-SV seismograms, *Geophysics*, volume 53, pp. 1425-1436, 1988.
- [4] **Hamilton, E. L.**, Geoacoustic modeling of the sea floor, *J. Acoust. Soc. Am.*, volume 68, pp. 1313-1339, 1980.